

BPSE24V40ART2U/BPSE48V40ART2U
BPSE72V40ART2U

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

1. Input Connector
2. On-board Replaceable Fuse Cover
3. Output Connector
4. Automatic Detection of Extended Battery Module Connector

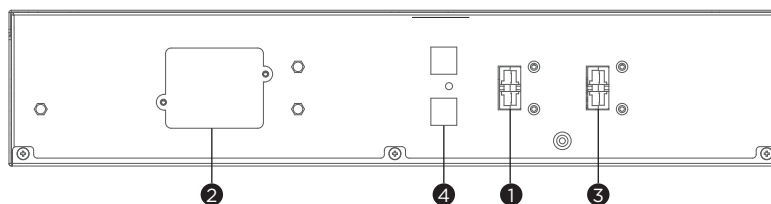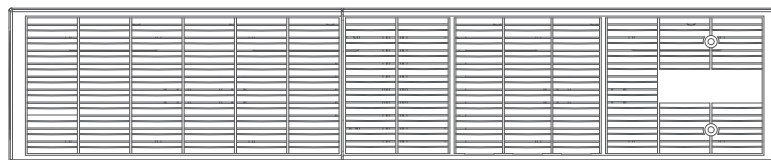

BPSE24V40ART2U/BPSE48V40ART2U/BPSE72V40ART2U



TECHNICAL SPECIFICATIONS

Model Name	BPSE24V40ART2U		BPSE48V40ART2U	BPSE72V40ART2U
General				
Nominal Output Voltage (Vdc)	24		48	72
Rated Output Current (A)	40			
Battery				
Battery Type	Sealed Lead-acid			
Built-in Charger	No			
Typical Recharge Time (Hours)	Depends on Connected UPS			
User-replaceable	Yes			
Expansion Ready	Yes			
Replacement Battery Pack	RBP0153		RBP0154	RBP0158
Replacement Battery Pack Quantity (pcs)	2			
Compatible UPS	OLS1000ERT2UA		OLS2000ERT2UA	OLS3000ERT2UA
Physical				
Form Factor	Rackmount, Tower			
Physical Size				
Dimensions (WxHxD) (mm.)	438 x 88 x 430			438 x 88 x 610
Weight (kg.)	16.24		26.74	38.75
Installed Rack Height (U)	2			
Environmental				
Operating Temperature (°C)	0 - 40			
Operating Relative Humidity (Non-condensing) (%)	0 - 90			
Certifications				
Certifications*	CE			
RoHS	Yes			

*Certifications may vary according to different regions. Visit www.cyberpower.com/mx for more information.
#All specifications are subject to change without notice.

