

BPSE240V75ART3U
BPSE240V75ART3UOAEXTENDED BATTERY MODULE
TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- EBM Expansion Capability
- Sealed Lead-acid Batteries
- Metal Housing

PRODUCT CALLOUTS

1. On-board Replaceable Fuse Cover
2. DC Output Connector
3. Battery Input Terminal Block

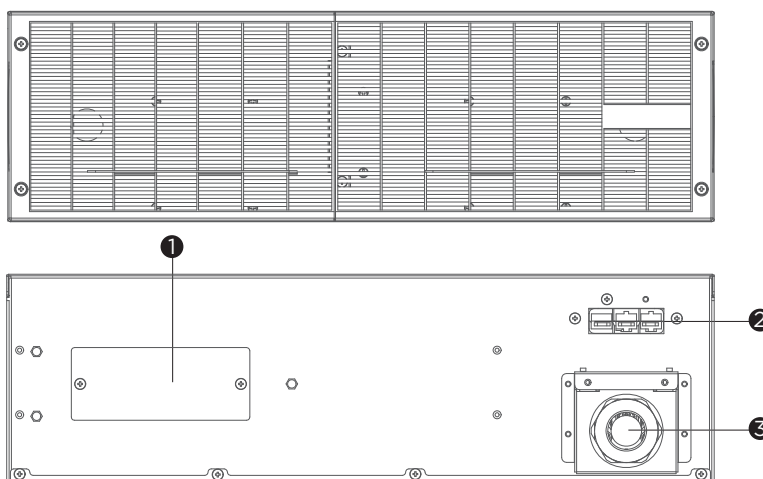

BPSE240V75ART3U/BPSE240V75ART3UOA

TECHNICAL SPECIFICATIONS

Model Name	BPSE240V75ART3U		BPSE240V75ART3UOA
General			
Nominal Output Voltage (Vdc)	240		
Rated Output Current (A)	75		
Battery			
Battery Type	Sealed Lead-acid		
Built-in Charger	No		
Typical Recharge Time (Hours)	7 (Depends on Connected UPS)		
User-replaceable	No		
Expansion Ready	Yes		
Compatible UPS	OLS6000ERT6U, OLS6000ERT6UM, OLS6000ERTXL3U		OLS10000ERT6U, OLS10000ERT6UM, OLS10000ERTXL3U
Physical			
Form Factor	Rackmount, Tower		
Physical Size			
Dimensions (WxHxD) (mm.)	438 x 130.5 x 680		
Weight (kg.)	55	66	
Installed Rack Height (U)	3		
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Certifications			
Certifications*	CE		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.

